



# Index-2 hybrid DAE: a case study with well-posedness and numerical analysis

Alexandre Rocca, Vincent Acary, Bernard Brogliato

## ► To cite this version:

Alexandre Rocca, Vincent Acary, Bernard Brogliato. Index-2 hybrid DAE: a case study with well-posedness and numerical analysis. IFAC World Congress 2020, Jul 2020, Berlin, Germany. hal-02391311

**HAL Id: hal-02391311**

**<https://hal.science/hal-02391311>**

Submitted on 3 Dec 2019

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

# Index-2 hybrid DAE: a case study with well-posedness and numerical analysis

Alexandre Rocca\* Vincent Acary\* Bernard Brogliato\*

\* *University Grenoble-Alpes, Inria, CNRS, Grenoble INP, LJK, 3800  
Grenoble, France (e-mail: firstname.surname@inria.fr).*

**Abstract:** In this work, we study differential algebraic equations with constraints defined in a piecewise manner using a conditional statement. Such models classically appear in systems where constraints can evolve in a very small time frame compared to the observed time scale. The use of conditional statements or hybrid automata are a powerful way to describe such systems and are, in general, well suited to simulation with event driven numerical schemes. However, such methods are often subject to chattering at mode switch in presence of sliding modes, or can result in Zeno behaviours.

In contrast, the representation of such systems using differential inclusions and method from non-smooth dynamics are often closer to the physical theory but may be harder to interpret. Associated time-stepping numerical methods have been extensively used in mechanical modelling with success and then extended to other fields such as electronics and system biology.

In a similar manner to the previous application of non-smooth methods to the simulation of piecewise linear ODEs, non-smooth event-capturing numerical scheme are applied to piecewise linear DAEs. In particular, the study of a 2-D dynamical system of index-2 with a switching constraint using set-valued operators, is presented.

*Keywords:* Hybrid Systems, ODE, DAE, Nonsmooth Dynamical Systems, Linear Complementarity Problem

## 1. INTRODUCTION

The aim of this work is to study hybrid differential algebraic equations (hybrid DAE), i.e., dynamical systems with some algebraic constraints switching with respect to the state variables. Such hybrid DAE systems are used in numerous field from electronics, Acary et al. (2010) to chemical process engineering, Stechlinski et al. (2018). They are especially used in model-based design through the use of language like MODELICA as in Henningsson et al. (2019).

Various work already studied hybrid DAEs. For example, DAE including complementarity constraints are a subset of differential variational inequalities (DVI). DVIs are defined and studied in Pang and Stewart (2008). In particular, they analyse the well-posedness of index one DVI and DAE of mixed index between 1 and 2. Matrosov (2006) proposes a concept of solutions, which is inspired by the one of Filippov (1960), for DAE with discontinuous constraints and differential part. He gives sufficient conditions for existence of solutions in Matrosov (2006), and sufficient condition for uniqueness in Matrosov (2007).

Hamann and Mehrmann (2008) and Mehrmann and Wunderlich (2009) provide a study of well-posedness of hybrid DAE structured as a hybrid automata. In addition, a numerical implementation of sliding modes for DAE systems is provided to avoid chattering when switching. It is interesting to note that the sliding solutions obtained in Mehrmann and Wunderlich (2009) are similar to the solutions from Matrosov (2006), assuming the solution of  $\mathbf{z}(t)$

in each mode is obtained by index reduction. Furthermore, Mehrmann and Wunderlich (2009) need explicit transition functions from one mode (DAE) to another, in addition to consistent reset conditions. Trenn (2012) defines solutions of hybrid DAE with exogenous switching. In particular, he introduces the notion of distributional solutions which can also be used to efficiently solve inconsistent initial conditions of classical DAE as an exogenous switching at  $t = 0$ . Camlibel et al. (2016) extend results of well-posedness of differential inclusions to differential algebraic inclusions  $P\dot{\mathbf{x}} \in -\mathcal{F}(\mathbf{x})$  with a maximal monotone operator  $\mathcal{F}(\cdot)$ . Then, assuming the passivity of the Weierstrass-Kronecker form of a system (1) with  $\mathcal{M}(\cdot)$  a maximal monotone operator, sufficient conditions for the well-posedness of absolutely continuous (AC) solutions of (1) are given.

$$\begin{cases} E\dot{\mathbf{y}}(t) = \mathbf{A}\mathbf{y}(t) + \mathbf{B}\boldsymbol{\lambda}(t) + \mathbf{e} \\ \mathbf{w}(t) = \mathbf{C}\mathbf{y}(t) + \mathbf{D}\boldsymbol{\lambda}(t) + \mathbf{q} \\ \mathbf{w}(t) \in \mathcal{M}(-\boldsymbol{\lambda}(t)). \end{cases} \quad (1)$$

It important to note that this formalism is the closest to the example studied in this paper (see (5)), with the notable difference that in our case the operator  $\mathcal{M}(\cdot)$  is not maximal monotone but hypo-monotone. Additionally, its rewriting in the form of (1) with maximal monotone operator is not a passive system.

Stechlinski et al. (2018); Barton et al. (2018), and Khan (2018) define from the Clarke jacobian a notion of generalised differential index and an associated index reduction procedure in the context of non-smooth DAE, with at least Lipschitz continuous constraints. Current implementation and theory are limited to semi-explicit index-1 non-smooth

DAE. Finally, we can cite another work for index reduction of hybrid DAE based on non standard analysis by Benveniste et al. (2017). This work uses non-standard analysis to construct well-defined transitions from one mode to another in the context of hybrid DAE even in the presence of varying index. In particular, this work pairs well with Mehrmann and Wunderlich (2009), which needs the knowledge of transition and re-initialisation maps when switching from one mode to another.

Let us now define the general framework of linear hybrid DAE that we wish to study from the point of view of non-smooth dynamics, and event-capturing numerical methods. We wish to consider hybrid linear DAE defined as:

$$\begin{cases} \dot{\mathbf{x}}(t) = \mathbf{A}\mathbf{x}(t) + \mathbf{B}\mathbf{z}(t) + \mathbf{e} \\ 0 = \mathbf{g}_i(\mathbf{x}(t), \mathbf{z}(t)) = \mathbf{C}_i\mathbf{x}(t) + \mathbf{D}_i\mathbf{z}(t) + \mathbf{q}_i \\ , \forall (\mathbf{x}(t), \mathbf{z}(t)) \in \mathcal{X}_i. \end{cases} \quad (2)$$

The sets  $\mathcal{X}_i = \{(\mathbf{x}, \mathbf{z}) \in \mathbb{R}^{n_1+n_2=n} \mid \mathbf{h}_i(\mathbf{x}, \mathbf{z}) = \mathbf{H}_i\mathbf{x}(t) + \mathbf{F}_i\mathbf{z}(t) + \mathbf{p}_i > 0\}$  define a partition of  $\mathbb{R}^n$  such that:

- $\bigcup_i \mathcal{X}_i = \mathbb{R}^n$
- $\text{int}(\mathcal{X}_i) \neq \emptyset, \quad \forall i$
- for  $i \neq j, \partial\mathcal{X}_i \cap \partial\mathcal{X}_j = \emptyset$

where,  $\mathbf{x}, \mathbf{z}$  are the differential and algebraic variables, respectively. We can build using step-functions<sup>1</sup> in a similar fashion to Acary et al. (2014) a generalised constraint.

$$\mathbf{g}(\mathbf{x}, \mathbf{z}) = \sum_i \left( \prod_{j \neq i} (1 - s^+(\mathbf{h}_j(\mathbf{x}, \mathbf{z}))) \right) s^+(\mathbf{h}_i(\mathbf{x}, \mathbf{z})) \mathbf{g}_i(\mathbf{x}, \mathbf{z}) \quad (3)$$

= 0

where  $s^+(\mathbf{y}) = 0$  if  $\mathbf{y} < 0$  and  $s^+(\mathbf{y}) = 1$  if  $\mathbf{y} > 0$ , the behaviour in  $\mathbf{y} = 0$  depending on later relaxations. In particular, in the context of piecewise ODE, the work of Acary et al. (2014) shows that methods for non-smooth dynamics can be efficiently applied using such reformulation. Then, depending on the concept of solutions applied on the switching surfaces (using convexification as in Filippov (1960), or using multivalued functions as in Aizerman and Pyatnitskiy (1974)), the resulting solutions may differ. Here, we study the extension of such concepts of solutions when applied to switching constraints instead of switching vector fields.

In this work, and its associated working example, we restrain ourselves to the simple case with only two algebraic constraints  $\mathbf{C}_1\mathbf{x} + \mathbf{D}_1\mathbf{z} + \mathbf{q}_1 = 0$  and  $\mathbf{C}_2\mathbf{x} + \mathbf{D}_2\mathbf{z} + \mathbf{q}_2 = 0$  and one switching condition depending on the sign of  $\mathbf{h}(\mathbf{x}, \mathbf{z}) = \mathbf{H}\mathbf{x}(t) + \mathbf{F}\mathbf{z}(t)$ . Then, we construct a relaxation of these two constraints along the switching surface  $\mathbf{h}(\mathbf{x}, \mathbf{z}) = 0$  by “filling the graph”. Such relaxed constraint can be designed in  $\mathbf{h}(\mathbf{x}, \mathbf{z}) = 0$  by considering the convex hull of the left and right limit of  $\mathbf{g}(\mathbf{x}, \mathbf{z})$  when  $\mathbf{h}(\cdot) < 0$  and  $\mathbf{h}(\cdot) > 0$ , respectively. We could also consider multi-valued step functions in (3) in a similar fashion to Aizerman and Pyatnitskiy (1974) approach for discontinuous ODEs. For this working example, we consider the convexification of the constraints along the switching surface.

As we have seen, most results consider either a high index hybrid DAE framework with event-driven numerical

methods and explicit transition functions, or mainly index-1 DAE with non-smooth constraints aiming at rewriting the system as a differential inclusion<sup>2</sup> into a Lipschitz function, or a maximal monotone operator. In this paper, a bridge between the hybrid DAE formalism and the non-smooth DAE formalism is established. We show on a simple working example the difficulties arising with such relaxations, as well as how classical non-smooth numerical methods perform in this context. We also propose some modification to the numerical scheme to overcome the associated troubles. The article is organized as follows: in Section 2.1 we study the necessary and sufficient conditions for existence of absolutely continuous solutions to our working example. In Section 2.3.1, we study the well-posedness of the jumps dynamics associated with this example, and in particular the resulting generalised equation. In Section 2.4.1, we analyse the well-posedness of the implicit Euler numerical scheme when applied on our case study and we propose variation of the implicit Euler scheme to solve problems arising in this example. Finally, in Section 2.5 we give some numerical simulations using our proposed numerical scheme, and we show experimentally on some cases a convergence in  $O(h)$ . Conclusions, and final thoughts are given in Section 3.

## 2. ANALYSIS OF A HYBRID DAE EXAMPLE

Let us first introduce some notations. Vectors of real variables  $\mathbf{x} = (x_1, \dots, x_i, \dots, x_n)$  in  $\mathbb{R}^n$  are denoted in **bold**. In the context of algebraic differential systems, the variables  $\mathbf{x}$  will denote differential variables, while  $\mathbf{z}$  will denote algebraic variables. In the context of non-smooth expression, we will in general note  $\boldsymbol{\lambda}$  the Lagrange multipliers. We now consider the working example of this paper:

$$\begin{cases} \dot{x}_1(t) = 1 + B_1 z(t) \\ \dot{x}_2(t) = B_2 z(t) \\ \text{if } x_1 > 0 \text{ then :} \\ \quad 0 = 1 + x_1(t) - x_2(t) \\ \text{if } x_1 < 0 \text{ then :} \\ \quad 0 = -1 - x_1(t) - x_2(t) \end{cases} \quad (4)$$

which is a particular case of (2) with  $\mathbf{A} = 0, \mathbf{B} = (B_1, B_2)^T, \mathbf{C}_1 = (1, -1), \mathbf{C}_2 = (-1, -1), \mathbf{H}_1 = (-1, 0), \mathbf{H}_2 = (1, 0), \mathbf{D}_1 = 0, \text{ and } \mathbf{D}_2 = 0$ . In  $x_1 = 0$ , the system does not have continuous solutions whatever the active constraint, so we keep strict inequalities in (4).

As exposed in the introduction, the hybrid constraints can be embedded into a set-valued constraint obtained by convexification. We construct the hybrid DAE system (5) where the constraint is  $0 = -x_2 + \lambda(x_1 + 1)$  with  $\lambda \in \text{sign}(x_1)$ . This set-valued algebraic constraint equals the ones of (4) when  $x_1 < 0$  (respectively  $x_1 > 0$ ), and is a convex relaxation of both in  $x_1 = 0$ : that is  $x_2 \in \text{convexHull}(\{x_2 = -1\}, \{x_2 = 1\}) = [-1, 1]$  (see Fig. 1). This yields the non-smooth DAE system (5):

$$\begin{cases} \dot{x}_1(t) = 1 + B_1 z(t) \\ \dot{x}_2(t) = B_2 z(t) \\ 0 = \lambda(t)(1 + x_1(t)) - x_2(t) \\ \lambda(t) \in \text{sign}(x_1(t)), \end{cases} \quad (5a)$$

$$\begin{cases} \dot{x}_1(t) = 1 + B_1 z(t) \\ \dot{x}_2(t) = B_2 z(t) \\ 0 = \lambda(t)(1 + x_1(t)) - x_2(t) \\ \lambda(t) \in \text{sign}(x_1(t)), \end{cases} \quad (5b)$$

<sup>1</sup> or using sign functions

<sup>2</sup> differential algebraic inclusion in the case of Camlibel et al. (2016)

where  $\text{sign}(\cdot)$  is a set-valued operator,  $\text{sign} : \mathbb{R} \rightrightarrows \mathbb{R}$ , such that:

$$\text{sign}(x) = \begin{cases} \{-1\}, & \text{if } x < 0 \\ [-1, 1], & \text{if } x = 0 \\ \{1\}, & \text{if } x > 0. \end{cases}$$

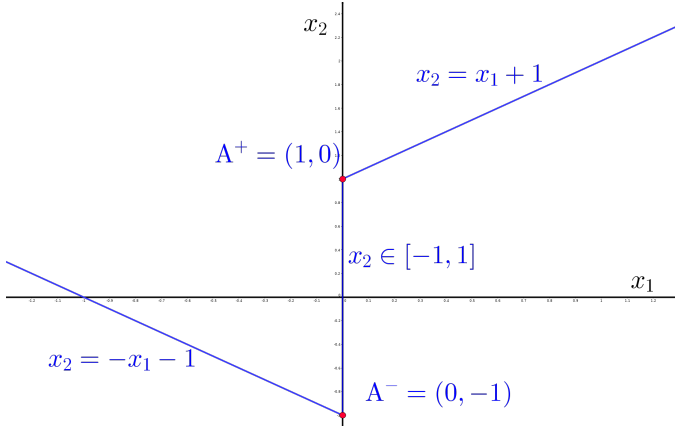


Fig. 1. Phase-space representation of the constraint of (4) and (5b)

### 2.1 Analysis of absolutely continuous solutions

Let us study the conditions on the differential part of the DAE (5), and in particular on the parameters  $B_1, B_2$ , for the existence of absolutely continuous solution  $x_1(t), x_2(t)$  to (5), and in particular a sliding mode along the switching surface  $x_1 = 0$ , for arbitrary time interval and initial conditions. Let us also observe that solutions  $(x_1(t), x_2(t))$  of the non-smooth constraint of system (5) are such that:

$$0 \in -x_2(t) + |x_1(t)| + \text{sign}(x_1(t)). \quad (6)$$

**Definition 1.** (Global AC solutions). We say there exists global AC solutions if for some initial conditions  $\mathbf{x}(t_0)$  satisfying (6), there exists a solution to (5a) almost everywhere and to (5b) for all  $t \in [t_0, T]$ , and any  $T > t_0$ .

Let us state the main result of this section.

**Proposition 2.** (AC solutions). The system defined in (5) has global AC solutions on an arbitrary interval  $[t_0, T]$ ,  $T > t_0$  for any consistent initial condition  $\mathbf{x}(0)$ , if and only if  $B_1, B_2$  are chosen such that:

$$B_1 \neq 0, \frac{B_2}{B_1} \leq 0, (B_1 + B_2) \neq 0. \quad (7)$$

For the sake of conciseness, we will give in this paper the sketch, and the main ideas of the proof. For the complete proof we refer to Rocca et al. (2019).

**Proof.** Let us consider first the existence of solutions to the piecewise DAE system (5), we first consider the conditions of existence of solutions in each mode: mode 1 ( $x_1 < 0$ ), mode 2 ( $x_1 > 0$ ), mode 3 ( $x_1 = 0$ ). Then, we consider the conditions where solutions can switch from one mode to another. For example, let us study the solution which are AC in the mode 1. Solutions in mode 1 are such that  $x_1(t) < 0, \lambda(t) = -1$  for all  $t \in [t', t' + \varepsilon] \triangleq I_\varepsilon$ ,

with  $\varepsilon > 0$ . Therefore, for all  $t \in I_\varepsilon$  such that  $x_1(t) < 0$ , solutions of (5) in mode 1 must also satisfy:

$$\begin{aligned} -\dot{x}_2(t) - \dot{x}_1(t) &= 0 \Leftrightarrow (B_2 + B_1)z(t) + 1 = 0 \\ &\Leftrightarrow z(t) = \frac{-1}{B_2 + B_1}, \end{aligned}$$

which has a solution if and only if  $(B_2 + B_1) \neq 0$ . We deduce that there exist AC solutions in mode 1 if and only if  $(B_2 + B_1) \neq 0$ , and we say that mode 1 is not feasible if  $(B_2 + B_1) = 0$ . We note (see (4) and (5)) that this corresponds to  $C_1 B$  non-singular with  $C_1 = (-1, -1)$ . This condition on  $B$  is the same as: the system must be of differentiation index 2 in mode 1 (similarly for mode 2 and 3). Then, the following result holds:

$$\dot{x}_1(t) = \frac{B_2}{B_2 + B_1}.$$

We deduce that either  $\dot{x}_1(t) \leq 0$  and  $x_1(t) < 0$  for all  $t > t'$ , or  $\dot{x}_1(t) > 0$  and there exists  $t_1 > t'$  such that  $x_1(t_1) = 0$ :

- If  $(B_1 + B_2)B_2 \leq 0$  then  $\dot{x}_1(t) \leq 0$ , for all  $t \in [t', +\infty[ \triangleq I_\infty$ : the system stays in mode 1 forever.
- If  $(B_1 + B_2)B_2 > 0$  then  $\dot{x}_1(t) > 0$ , for  $t > t'$ . Moreover, for  $t_1 = -x_1(t') \frac{B_1 + B_2}{B_2} + t'$  we have  $\mathbf{x}(t_1) = (0, -1)$  and the trajectory reaches mode 3.

We can already provide a necessary<sup>3</sup> condition on  $B = (B_1, B_2)^T$  for the existence of global AC solutions in mode 1:

$$B_1 + B_2 \neq 0. \quad (\text{Cond } A_1)$$

We can proceed in a similar fashion for mode 2, and 3. Then, conditions on  $B_1, B_2$  for existence of global AC solution for solutions staying in any of this three modes are given by:

$$B_1 + B_2 \neq 0, B_1 - B_2 \neq 0, B_1 \neq 0. \quad (\text{Cond } A)$$

Let us consider now the conditions for existence of solutions such that there exists a continuous transition from one mode to another. For example, let us study the condition for a transition from mode 3 to mode 1 (case 4.3 in Rocca et al. (2019)). Let us assume  $x_1(t') = 0$  and  $\frac{B_2}{B_1} > 0$ : then there exists some time  $t_1 > t'$  such that  $x_2(t_1) = -1$ . Furthermore, we need  $\dot{x}_1(t_1^+) < 0$  to switch to mode 1: this is equivalent to the condition  $(B_1 + B_2)B_2 < 0$ . However, there is no  $B = (B_1, B_2)^T$  such that  $(B_1 + B_2)B_2 < 0$  and  $\frac{B_2}{B_1} > 0$  and solutions cannot continue further than point  $A^-$ . Consequently, the condition (Cond A) must be further restricted to:

$$B_1 + B_2 \neq 0, \frac{B_2}{B_1} \leq 0, B_1 \neq 0. \quad (\text{Cond } B)$$

We note that  $B_1 - B_2 \neq 0$  always holds for  $\frac{B_2}{B_1} \leq 0$ . In a similar fashion, considering the conditions for existence of a continuous transition taking the modes two by two, we can conclude that (Cond B) is a necessary and sufficient condition for the existence<sup>4</sup> of global AC solutions assuming an arbitrary consistent initial condition.  $\square$

In Fig. 2, we summarise the conditions of Proposition 2 for existence of global AC solutions for any initial

<sup>3</sup> Note this is a sufficient and necessary condition for existence of local solution in mode 1, however this is only a necessary condition for global solutions of the hybrid DAE (5).

<sup>4</sup> However, this does not prove the uniqueness of solutions.

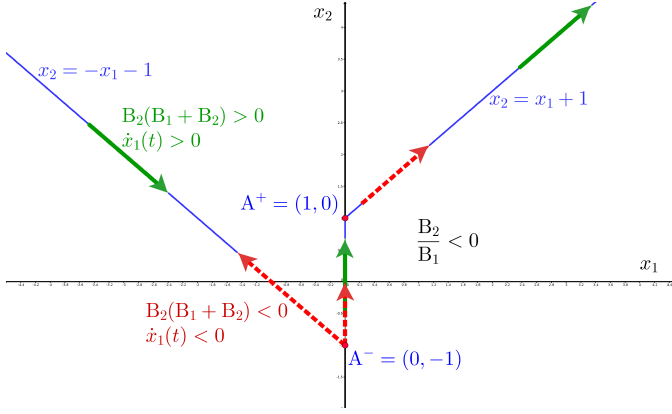


Fig. 2. In red (dashed vectors) the “sliding-repulsive” solutions, and in green (full vectors) the “sliding-crossing” solutions.

conditions satisfying (6). The set of parameters  $B_1, B_2$  that satisfy these conditions can be separated in two subsets: the subset yielding “sliding-crossing” solutions which are unique with respect to the initial conditions, and the subset leading to “sliding-repulsive” solutions, which are not unique in  $\mathbf{x}(t_0) = (0, -1)^T$ .

## 2.2 Analysis of the index reduced system Filippov solutions.

We can compare the sliding mode obtained in the proof of Proposition 2 (motion in the segment  $[A^-, A^+]$ ), with the study of the solutions from Filippov (1960) in  $x_1 = 0$  associated with the switching ODE obtained by index reduction of the DAE in  $x_1 < 0$  and  $x_1 > 0$ . Such solutions are defined, for example in Mehrmann and Wunderlich (2009). The left vector field  $\mathbf{f}^-(\cdot)$  (for  $x_1 < 0$ ) and right vector field  $\mathbf{f}^+(\cdot)$  (for  $x_1 > 0$ ) are given by:

$$\mathbf{f}^-(t, \mathbf{x}(t)) = \begin{pmatrix} B_2 \\ B_1 + B_2 \\ -B_2 \\ B_1 + B_2 \end{pmatrix} \quad \mathbf{f}^+(t, \mathbf{x}(t)) = \begin{pmatrix} -B_2 \\ B_1 - B_2 \\ -B_2 \\ B_1 - B_2 \end{pmatrix}.$$

In the case of “sliding-repulsive” solutions, the switching ODE resulting from the index reduction yields the sliding motion  $f_0(\mathbf{x}) = \text{convexHull}(f^-(\mathbf{x}), f^+(\mathbf{x})) \cap \{\mathbf{x} \in \mathbb{R}^2 | x_1 = 0\}$ . The associated solutions correspond to the same solutions we obtain by our relaxation of the switching constraint by a generalised equation.

In the particular case of “sliding-crossing” solutions, the index reduced system does not lead to any sliding motions as  $\text{convexHull}(f^-(\mathbf{x}), f^+(\mathbf{x}))$  does not intersect the switching surface. The solutions do not stay on the surface  $x_1 = 0$ , and due to the index reduction the constraint in  $x_1 > 0$  is not satisfied anymore if  $x_1(t_0) < 0$ . Following the guidelines for sliding mode detection given by Mehrmann and Wunderlich (2009), an explicit transition function is necessary for continuation. The sliding solutions we obtain using our relaxation is not retrieved by Mehrmann and Wunderlich (2009) approach.

We note that the approach of convexifying the left and right reduced DAEs has already show to be wrong for some cases in Matrosov (2007) with an index-1 non-smooth example.

## 2.3 Analysis of solutions with bounded discontinuities.

Let us study the existence of discontinuous solutions when the trajectory cannot continue anymore with an absolutely continuous solution after some time  $t_j$ . For example, this is the case if the trajectory reaches the point  $A^-$  in Fig. 1 with  $\frac{B_2}{B_1} > 0$ . Solutions with discontinuities make sense in a context where the real system evolves in a time scale much smaller than the one considered in the model.

*Analysis of jump dynamics* Assume there is a jump at some time  $t_j$ . We first introduce the measure differential inclusions (MDI) (8) associated with (5). Let us note  $d\mathbf{x}$  the differential measure of  $\mathbf{x}(t)$ . Let us notice that both sides of the dynamics are considered as Schwartz distributions. Hence  $z$  is to be considered as a measure. In term of equality of measures we obtain:

$$\begin{cases} dx_1 = dt + B_1 d\Lambda_z \\ dx_2 = B_2 d\Lambda_z \\ 0 \in -x_2(t) + |x_1(t)| + \text{sign}(x_1(t)), \end{cases} \quad (8)$$

with  $d\Lambda_z(t) = z(t)dt + \sigma_z \delta_{t_j}$  with  $dt$  the Lebesgue measure associated with time,  $\delta_{t_j}$  the Dirac distribution at  $t = t_j$ , and  $\sigma_z$  the amplitude of the jump. Then, at  $t_j$  the system (8) becomes the algebraic system:

$$\begin{cases} x_1(t_j^+) - x_1(t_j^-) = B_1 \sigma_z \\ x_2(t_j^+) - x_2(t_j^-) = B_2 \sigma_z \\ 0 \in \lambda(t_j^+) + |x_1(t_j^+)| - x_2(t_j^+) \\ \lambda(t_j^+) \in \text{sign}(x_1(t_j^+)). \end{cases} \quad (9)$$

We assume  $\mathbf{x}(t)$  is an AC solution for all  $t < t_j$ , that is  $\mathbf{x}(t_j^-)$  is satisfying the constraint (6) and there exists  $\lambda(t_j^-) \in \text{sign}(x_1(t_j^-))$  such that  $0 = \lambda(t_j^-) + |x_1(t_j^-)| - x_2(t_j^-)$ . Multiplying the first and second lines of (9) by  $B_2$  and  $B_1$ , respectively, one can eliminate  $\sigma_z$  in (9) which can be rewritten as:

$$\begin{cases} B_2 (x_1(t_j^+) - x_1(t_j^-)) = B_1 (x_2(t_j^+) - x_2(t_j^-)) \\ 0 \in \lambda(t_j^+) + |x_1(t_j^+)| - x_2(t_j^+) \\ \lambda(t_j^+) \in \text{sign}(x_1(t_j^+)) \end{cases}$$

Note that for now we do not enforce conditions for existence of a continuous solutions at  $t_j^+$  immediately after the jump: we only define jump solutions respecting both formulations with the measures, and the constraint at  $t_j^+$ . Let us analyse the jump dynamics in (9). In a similar fashion to Proposition 2, we give the solutions of (9) depending on the parameters  $B_1, B_2$ .

*Proposition 3. (Jump Dynamics analysis).* Let consider the case  $B_1 \neq 0$ : if  $B_2/B_1 < -1$  there is a unique solution to (9), otherwise if  $B_2/B_1 \geq -1$  there are either one or several solutions depending on  $\mathbf{x}(t_j^-)$ . Let us now consider  $B_1 \neq 0$ : if  $x_2(t_j^-) \in [-1, 1]$  there are infinitely many solutions, otherwise there is only one solution.

**Proof.**

- Assume  $B_1 \neq 0$ , then (9) can be further reduced into:

$$0 \in \text{sign}(x_1(t_j^+)) + |x_1(t_j^+)| - \frac{B_2}{B_1} (x_1(t_j^+) - x_1(t_j^-)) - x_2(t_j^-), \quad (10)$$

which is an equation of the form:

$$0 \in f(x) + \mathcal{F}(x), \quad (11)$$

where  $\mathcal{F} : \mathbb{R} \rightrightarrows \mathbb{R}$  is the maximal monotone operator  $\text{sign}(x)$ , and  $f : \mathbb{R} \rightarrow \mathbb{R}$  is a Lipschitz continuous function. In particular, here we have:

$$f(x) = ax + b|x| + c, \quad (12)$$

with  $a = \frac{-B_2}{B_1}$ ,  $b = 1$ , and  $c = \frac{B_2}{B_1}x_1(t_j^-) - x_2(t_j^-)$ . We can first notice that by assumption  $\mathbf{x}(t_j^-)$  is solution of this generalised equation and for jump dynamics there is always existence of solutions. We now give a more in-depth study of the solutions of (11) in a general context, as this will prove to be useful for the study of numerical solutions in Section 2.4. Let now analyse the conditions for existence and/or uniqueness of solutions to such generalised equation. Proofs will be given in a succinct manner using Fig. 3 as a support. Again a more detailed study can be found in the associated report Rocca et al. (2019).

First, let us assume  $a - b \neq 0$  and  $a + b \neq 0^5$ . Then, depending on the sign of  $a - b$  and  $a + b$  we define an associated continuous piecewise linear function  $h(y)$ .

**(a)** Let first consider  $a - b > 0$  and  $a + b > 0$  which is equivalent to  $B_2/B_1 < -1$ . We define  $h(y) = f^{-1}(\mathbf{x})$  with  $h(y) = \frac{y-c}{a-b}$  if  $y \leq c$  and  $h(y) = \frac{y-c}{a+b}$  if  $y \geq c$ . We note that  $\text{sign}(x) = \partial|x|$  and the conjugate of  $g(x) = |x|$  is  $g^*(x) = \psi_{[-1,1]}(y)$  with  $\psi_K(\cdot)$  the indicator function of the set  $K$ . It follows from Rockafellar and Wets (2009) that the inverse of  $\text{sign}(x)$  is  $\mathcal{N}_{[-1,1]}(y) = \partial\psi_{[-1,1]}(y)$ . Consequently, the generalised equation (11) is equivalent to:

$$0 \in h(y) + \mathcal{N}_{[-1,1]}(y), \quad (13)$$

with  $\mathcal{N}_{[-1,1]}(y)$  the normal cone to  $[-1,1]$  in  $y$ . Finally,  $h(\cdot)$  is continuous on  $\mathbb{R}$  and as  $[-1,1]$  is a compact set in  $\mathbb{R}$ , it follows from (Facchinei and Pang, 2007, Corollary 2.2.5) that there is always existence of solutions to the general equation (13) (and equivalently (10)). Additionally, (Facchinei and Pang, 2007, Theorem 2.3.3) provides sufficient conditions for uniqueness: if  $h(\cdot)$  is strictly monotone. Strict monotonicity of  $h(\cdot)$  holds if and only if  $a + b > 0$  and  $a - b > 0$ , as it can be seen on Fig. 3. We recall that if there is a unique solution then this solution is  $\mathbf{x}(t_j^+) = \mathbf{x}(t_j^-)$ , and  $\sigma_z = 0$ . We have proved that  $a - b > 0$  and  $a + b > 0$  are sufficient conditions for existence and uniqueness of solutions to (12). In addition, these sufficient conditions do not depend of  $c$ . However, they are not necessary conditions.

**(b)** Let us study the case where  $a - b < 0$  and  $a + b > 0$ , which is equivalent to  $B_2/B_1 \in ]-1, 1[$ . Then, we can try to build another “piecewise function”  $h(y)$  by inverting the equation  $y = ax + b|x| + c$  for all  $x \in \mathbb{R}$ . However, it follows that the resulting  $h(\cdot)$  is a multi-valued operator defined on  $[c, +\infty[$ . Consequently, if  $c > 1$  there are no solutions. If  $c \leq 1$ , there is either a unique solution for  $c = 1$ , or multiple solutions if  $c < 1$ . A similar reasoning can be done for the case with  $a - b > 0$  and  $a + b < 0$ . However, the latter cannot occur if  $b = 1$  as in (10).

**(c)** Let now consider the case where  $a - b < 0$  and  $a + b < 0$ , which is equivalent to  $B_2/B_1 > 1$ . Then, the associated

<sup>5</sup> We remark the case  $a - b = 0$  or  $a + b = 0$  corresponds to  $B$  parallel to the right or left constraint. This means that DAEs in modes 1 and/or 2 are non-regular with  $C_1B$  and  $C_2B$  singular.

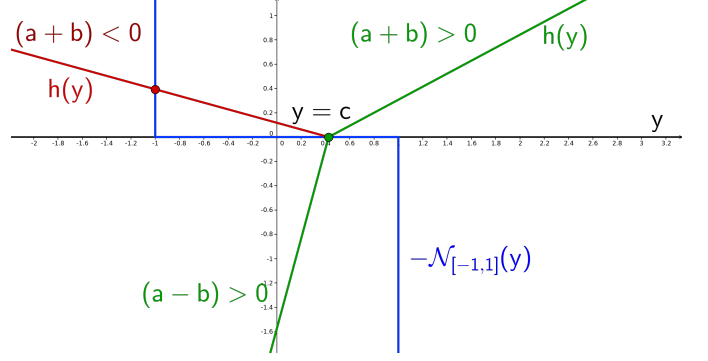


Fig. 3. solutions of the the generalised equation (13) for various sign of  $(a + b)$  and  $(a - b)$ .

piecewise function  $h(y)$  is continuous over  $\mathbb{R}$  and again using (Facchinei and Pang, 2007, Corollary 2.2.5) we can prove there is always existence of solutions, independently of  $c$ . Additionally, there is uniqueness if and only if  $c > 1$  or  $c < -1$ .

**(d)** Finally, if  $a - b = 0$  or  $a + b = 0$ , which correspond to  $B_2/B_1 = 1$  or  $-1$ , then one part of  $h(y)$  is multi-valued. For example if  $(a - b) = 0$  and  $(a + b) > 0$ ,  $h(\cdot)$  is defined on  $[c, +\infty[$  with  $h(y) \in \mathbb{R}^-$  if  $y = c$ , and  $h(y) = \frac{y-c}{a+b}$  if  $y > c$ : if  $c > 1$  there is no solutions. In a similar way, if  $(a + b) < 0$  then  $h(\cdot)$  is defined on  $]-\infty, c]$  and there is no solution if  $c < -1$ . Similar reasoning can be done for the cases with  $a + b = 0$ .

• Assume  $B_1 = 0$ , then from (9) it follows:

$$\begin{cases} x_1(t_j^+) = x_1(t_j^-) \\ x_2(t_j^+) = x_2(t_j^-) + B_2\sigma_z \\ x_2(t_j^+) \in |x_1(t_j^-)| + \text{sign}(x_1(t_j^-)) \end{cases} \quad (14)$$

We note that if  $x_1(t_j^-) \neq 0$ , there is a unique solution since  $|x_1(t_j^-)| + \text{sign}(x_1(t_j^-))$  is uniquely defined on  $\mathbb{R} \setminus \{0\}$ . If  $x_1(t_j^-) = 0$ , then there are multiple solutions (infinitely many) with  $x_2(t_j^+) \in [-1, 1]$ .  $\square$

For the sake conciseness we will not enter into the detailed analysis of all the consistent jumps in this paper. In Rocca et al. (2019), we provide a detailed study of the AC consistent initialisation associated with this example by crossing the information from the complete proof of Proposition 2, and from the analysis of the jump dynamics.

## 2.4 Analysis of a time-stepping Backward Euler scheme

Let now consider the backward Euler discretization of system (5):

$$\begin{cases} x_{1,k+1} - x_{1,k} = h(1 + B_1 z_{k+1}) \\ x_{2,k+1} - x_{2,k} = hB_2 z_{k+1} \\ 0 \in \text{sign}(x_{1,k+1}) + |x_{1,k+1}| - x_{2,k+1} \end{cases}, \quad (15)$$

with  $h$  a fixed time step.

*Well-posedness of backward Euler discretization* One sees that (15) has a structure quite close to (8), which puts the backward scheme as favourable perspective for the computations of solutions with jumps. This is the object





The idea is to notice that the Euler method gives an  $O(h)$  approximation of the solution of an index-2 linear DAE with constant coefficients (Brenan et al., 1996, Theorem 3.1.1). Consequently, if there exists a local continuous solutions for  $t \in [t_0, t_0 + \varepsilon]$  on a hypersurface  $C_i \mathbf{x} + D_i \mathbf{z} + e_i = 0$  and if the implicit Euler scheme, for  $h < \varepsilon$ , is such that  $C_i \mathbf{x}_{k+1} + D_i \mathbf{z}_{k+1} + e_i = 0$ , then this solution is a  $O(h)$  approximation of  $\mathbf{x}(t_0 + \varepsilon)$ . Although the implicit Euler scheme outputs multiple solutions, if one of the solutions is still on the same constraint as  $\mathbf{x}_k$ , we know this solution is an  $O(h)$  approximation. A proof on the above particular example is given in the associated report Rocca et al. (2019).

### 2.5 Implementation and numerical results

In this section we expose some simulation results of the implicit Euler scheme (18) on the example studied in the previous sections. In particular, numerical experiments demonstrate that for example (5), if there exists at least one continuous solution, then (18) converges in  $O(h)$  to one of these solutions. Furthermore, if the discretization (15) yields a unique solution for any step size, then it converges in  $O(h)$  to this unique solution of (5). Implementation has been performed using the software SICONOS 4.2.0 (see Acary and P  rignon (2007)), a platform for numerical simulation of non-smooth dynamical systems. The code of these simulations can be found in the github repository associated with the SICONOS examples<sup>8</sup>. In this section, performance results are not discussed as the optimisation problem in (18) is currently solved by enumeration of all<sup>9</sup> the solutions of the generalised equation associated with the classical implicit Euler scheme (15).

We implement this problem by formulating (6) as a Linear Complementarity Problem (LCP) with an equality constraint, also called Mixed Linear Complementarity Problem (MLCP).

$$\begin{cases} 0 = -x_2 + |x_1| + \alpha \\ 0 \leq |x_1| + x_1 \perp |x_1| - x_1 \geq 0 \\ 0 \leq x_1^- \perp \alpha \leq -1 \\ \alpha \leq 1 \perp x_1^+ \geq 0 \end{cases} \quad (19)$$

with  $\alpha \in \text{sign}(x_1)$ . This yields a linear complementarity system (LCS)<sup>10</sup>:

$$\begin{cases} \begin{pmatrix} 1 & 0 & 0 \\ 0 & 1 & 0 \\ 0 & 0 & 0 \end{pmatrix} \begin{pmatrix} \dot{x}_1(t) \\ \dot{x}_2(t) \\ \dot{z}(t) \end{pmatrix} = \begin{pmatrix} 1 + B_1 z(t) \\ B_2 z(t) \\ x_1 - x_2 + 1 + \mathbf{r}(\boldsymbol{\lambda}(t)) \end{pmatrix} \\ \mathbf{r}(\boldsymbol{\lambda}(t)) = \lambda_1(t) - \lambda_2(t) \\ 0 \leq 2x_1(t) + \lambda_1(t) \perp \lambda_1(t) \geq 0 \\ 0 \leq \lambda_3(t) + x_1(t) \perp \lambda_2(t) \geq 0 \\ 0 \leq 2 - \lambda_2(t) \perp \lambda_3(t) \geq 0 \end{cases} \quad (20)$$

with  $\boldsymbol{\lambda} = (\lambda_1, \lambda_2, \lambda_3) = (|x_1| - x_1, 1 - \alpha, x_1^-)$ . Some numerical results can be found in Fig. 5 and Fig. 6. In these figures, we consider the particular case of sliding-crossing solutions (here  $B = (-0.5, 1)^T$ ) where uniqueness of AC solutions and discrete solutions is guaranteed. We

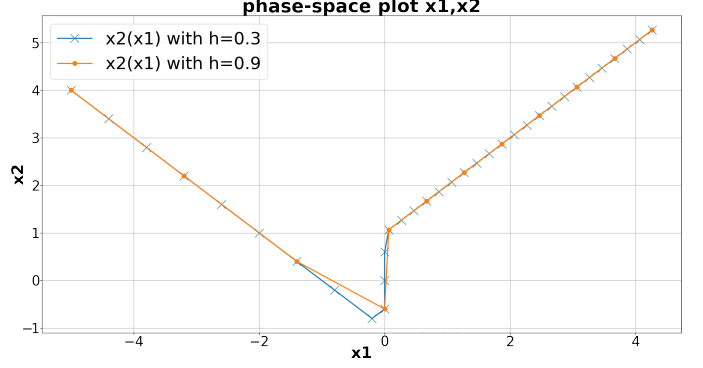


Fig. 5. Phase space plot in  $(x_1, x_2)$  of the numerical solutions for  $B = (-0.5, 1)$  and  $h = 0.9$  or  $h = 0.3$ . Initial condition is  $\mathbf{x}_0 = (-5, 4)$

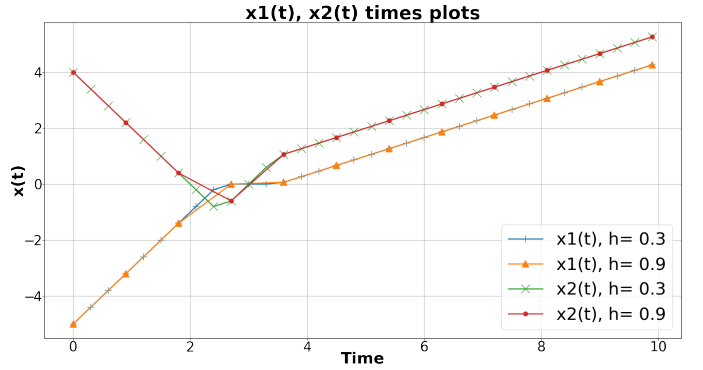


Fig. 6. Time plots of the solutions  $x_1(t)$  and  $x_2(t)$  for  $B = (-0.5, 1)$  and  $h = 0.9$  or  $h = 0.3$ . Initial condition is  $\mathbf{x}_0 = (-5, 4)$

notice that the resulting solutions in  $\mathbf{x}(t)$  are Lipschitz continuous, and run through all the modes (the initial condition is taken with  $x_1(t_0) < 0$ ). In Fig. 7, the error term  $\|Y(T) - Y_k\|$  in function of the step size  $h$  is depicted. The term  $Y_k$  is the numerical approximation of  $Y(T)$  by the minimal implicit Euler numerical scheme when the interval  $[t_0, T]$  is subdivided in  $k$  steps of size  $h$ . In the case of sliding-crossing solutions, we choose  $B = (-0.5, 1)^T$ ,  $\mathbf{x}_0 = \mathbf{x}(t_0) = (-5, 4)$ , and  $T = 10$ . In the case of sliding-repulsive solutions, we choose  $B = (-1, 0.5)^T$ ,  $\mathbf{x}_0 = \mathbf{x}(t_0) = (0, 0)$ , and  $T = 10$ . Time steps are taken linearly spaced in log scale. We observe the linear convergence rate of the implicit Euler scheme when there is uniqueness of the numerical solutions. In addition, we also observe a linear convergence rate of the minimal implicit Euler scheme when there is non-uniqueness of the discrete solution (for any time step) as it is shown in Fig 7 on the curve associated with the sliding-repulsive case.

### 3. CONCLUSION AND FUTURE WORK

In a first time, we analysed the AC solution of a 2D example of hybrid DAE. We show that in the context of piecewise linear constraints, we can observe multiplicity of AC solutions. Furthermore, it is not enough to study each mode independently to conclude on the well-posedness of AC solutions. In a second time, we studied the generalised equation resulting from the example jump dynamic. We conclude on the conditions for well-posedness of such equation, and build a framework for the study

<sup>8</sup> [https://github.com/siconos/siconos-tutorials/tree/master/.sandbox/code\\_IFAC](https://github.com/siconos/siconos-tutorials/tree/master/.sandbox/code_IFAC)

<sup>9</sup> In most cases limited to maximum 3 solutions.

<sup>10</sup> Please note that this LCS formulation is not unique as it depends of the naming convention for the  $\lambda_i$  variables.



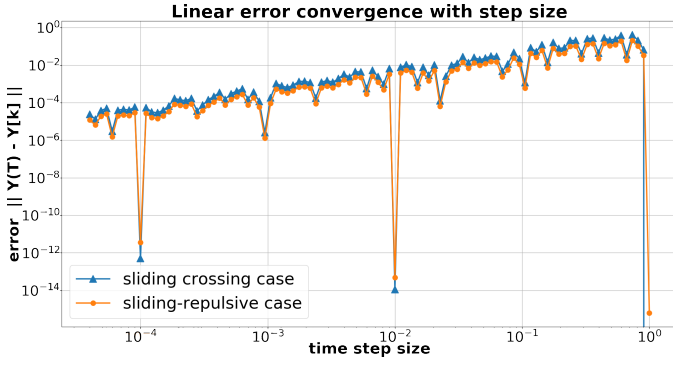


Fig. 7. Error  $\|Y(t) - Y_k\|$  with respect to time step  $h$ . We consider the two kind of AC solutions: the sliding-crossing solutions and the sliding-repulsive solutions.

of numerical solutions. Indeed, in the two last sections, we show that solutions of implicit Euler scheme, which is classically used as an event-capturing scheme for non-smooth dynamical systems, are solutions of an equation with the same structure as the jump dynamics. It follows that such numerical scheme can have either none, a unique, several, or infinitely many solutions depending of small variations on the considered problem. In particular, consistence of the numerical scheme is not preserved in some cases. However, on this example it can be proven that a “correct” discrete solution can always be retrieved from the numerous solutions of the implicit Euler scheme. Consequently, we propose a minimal implicit Euler numerical scheme to select the correct solutions assuming a time step sufficiently small. In future work, we will extend these results and observations to more general dynamics and switching constraint. Another, interesting research direction would be to make the link with Camlibel et al. (2016).

#### ACKNOWLEDGEMENTS

This work is partially supported by the Inria Project Lab (IPL) Modeliscale and the “Fonds unique interministériel” (FUI) Modeliscale.

#### REFERENCES

- Acary, V., Bonnefon, O., and Brogliato, B. (2010). *Non-smooth modeling and simulation for switched circuits*, volume 69. Springer Science & Business Media.
- Acary, V., De Jong, H., and Brogliato, B. (2014). Numerical simulation of piecewise-linear models of gene regulatory networks using complementarity systems. *Physica D: Nonlinear Phenomena*, 269, 103–119.
- Acary, V. and Péron, F. (2007). Siconos: A software platform for modeling, simulation, analysis and control of nonsmooth dynamical systems. *available on hal.inria.fr*.
- Aizerman, M. and Pyatnitskiy, E. (1974). Fundamentals of the theory of discontinuous systems. i. *Avtom. Telemekh.*, 7 & 8, 33–48 & 39–62.
- Barton, P.I., Khan, K.A., Stechliniski, P., and Watson, H.A. (2018). Computationally relevant generalized derivatives: theory, evaluation and applications. *Optimization Methods and Software*, 33(4-6), 1030–1072.
- Benveniste, A., Caillaud, B., Elmqvist, H., Ghorbal, K., Otter, M., and Pouzet, M. (2017). Structural analysis of multi-mode dae systems. In *Proceedings of the 20th International Conference on Hybrid Systems: Computation and Control*, 253–263. ACM.
- Brenan, K.E., Campbell, S.L., and Petzold, L.R. (1996). *Numerical Solution of Initial-Value Problems in Differential-Algebraic Equations*, volume 14. Siam.
- Camlibel, K., Iannelli, L., Tanwani, A., and Trenn, S. (2016). Differential-algebraic inclusions with maximal monotone operators. In *2016 IEEE 55th Conference on Decision and Control (CDC)*, 610–615. IEEE.
- Facchinei, F. and Pang, J.S. (2007). *Finite-dimensional Variational Inequalities and Complementarity Problems*. Springer Science & Business Media.
- Filippov, A.F. (1960). Differential equations with discontinuous right-hand side. *Matematicheskii sbornik*, 93(1), 99–128.
- Hamann, P. and Mehrmann, V. (2008). Numerical solution of hybrid systems of differential-algebraic equations. *Computer Methods in Applied Mechanics and Engineering*, 197(6-8), 693–705.
- Henningsson, E., Olsson, H., and Vanfretti, L. (2019). Dae solvers for large-scale hybrid models. In *Proceedings of the 13th International Modelica Conference, Regensburg, Germany, March 4–6, 2019*, 157. Linköping University Electronic Press.
- Khan, K.A. (2018). Branch-locking ad techniques for nonsmooth composite functions and nonsmooth implicit functions. *Optimization Methods and Software*, 33(4-6), 1127–1155.
- Matrosov, I.V. (2006). Existence of solutions of the algebro-differential equations. *Automation and Remote Control*, 67(9), 1408–1415.
- Matrosov, I.V. (2007). On right-hand uniqueness of solutions to nondegenerated algebro-differential equations with discontinuities. *Automation and Remote Control*, 68(1), 9–17.
- Mehrmann, V. and Wunderlich, L. (2009). Hybrid systems of differential-algebraic equations—analysis and numerical solution. *Journal of Process Control*, 19(8), 1218–1228.
- Pang, J.S. and Stewart, D.E. (2008). Differential variational inequalities. *Mathematical Programming*, 113(2), 345–424.
- Rocca, A., Acary, V., and Brogliato, B. (2019). Index-2 hybrid dae: a case study with well-posedness and numerical analysis. *research report available on hal.inria.fr*.
- Rockafellar, R.T. and Wets, R.J.B. (2009). *Variational Analysis*, volume 317. Springer Science & Business Media.
- Stechliniski, P., Patrascu, M., and Barton, P.I. (2018). Nonsmooth differential-algebraic equations in chemical engineering. *Computers & Chemical Engineering*, 114, 52–68.
- Trenn, S. (2012). Switched differential algebraic equations. In *Dynamics and Control of Switched Electronic Systems*, 189–216. Springer.